




Onnfix


Schlauch- und Dichtungstechnik

PTFE-854
FLEXIBLE SCHLÄUCHE

PTFE-854 Flexible Schläuche aus PTFE

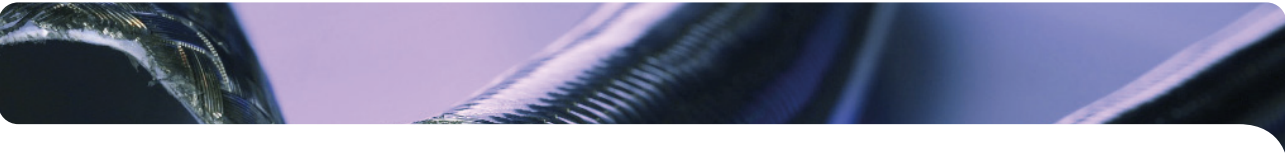

Anwendungen:

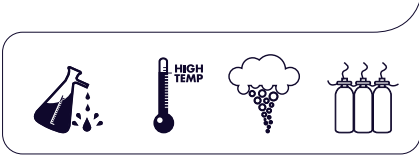

TYP	DN		WANDSTÄRKE	INNENØ	AUSSENØ	GEWICHT	BETRIEBSDRUCK (20°C)	BERSTDRUCK (20°C)	MIN. BIEGE RADIUS
	(mm)	(inches)	(mm)	(mm)	(mm)	(gr/mt)	(bar)	(bar)	(mm)
PTFE-854	3,2	1/8"	0,7	3,2	5,9	60	275	1100	25
PTFE-854	5	3/16"	0,7	4,8	7,4	69	200	750	35
PTFE-854	6	1/4"	0,7	6,35	9	87	188	680	45
PTFE-854	8	5/16"	0,7	7,9	10,8	127	170	600	50
PTFE-854	9,5	3/8"	0,7	9,5	12,4	145	162	650	55
PTFE-854	10,3	13/32"	0,7	10,3	13,3	158	150	600	65
PTFE-854	13	1/2"	0,7	12,7	15,7	212	120	480	70
PTFE-854	16	5/8"	0,7	15,9	19,1	260	100	400	130
PTFE-854	19	3/4"	0,8	19	22,2	321	90	360	190
PTFE-854	22	7/8"	0,8	22,2	25,6	355	70	280	250
PTFE-854	25	1"	0,8	25,4	29,3	450	65	260	270
PTFE-854	29	1.1/8"	1	28,6	32,5	525	55	220	300

Toleranz SAE 100 R14
AUCH IN LEITFÄHIGER AUSFÜHRUNG ERHÄLTlich.