



Metallwellschlauch W3 Wellung Eng

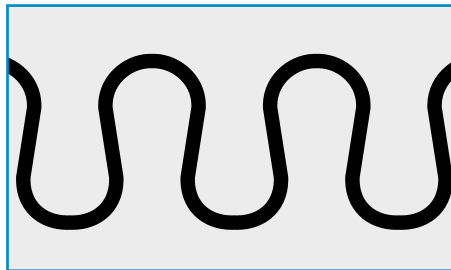

Daten MWS W3 Wellung Eng

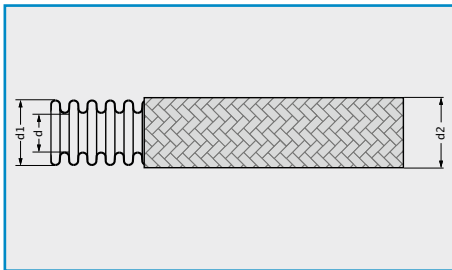

Werkstoff: 1.4404 (AISI 316 L)
Umflechtung: 1.4301 (AISI 304)
Schlauchdurchmesser: DN 6 - DN 100
Temperaturbereich: - 270 °C / + 600 °C

Bezeichnung	Innen Inch	Innen DN	d mm	d1 mm	d2 mm	Toleranz d, d1	BR stat. mm	BR dyn. mm	BD bei 20C° Bar	Kg/m
MWS W3 DN 6	1/4"	6	6,1	9,5	10,5	0,25	25	70	150	0,140
MWS W3 DN 8	5/16"	8	8,2	12,4	13,4	0,25	30	90	112	0,160
MWS W3 DN 10	3/8"	10	10,1	14,2	15,4	0,25	35	100	97	0,195
MWS W3 DN 12	1/2"	12	12,4	16,7	17,7	0,25	40	110	75	0,228
MWS W3 DN 16	5/8"	16	16,2	21,7	23,2	0,25	50	120	60	0,350
MWS W3 DN 20	3/4"	20	20,2	26,6	28,3	0,25	55	130	62	0,453
MWS W3 DN 25	1"	25	25,2	32,5	33,8	0,30	65	150	43	0,860
MWS W3 DN 32	1 1/4"	32	33,6	41,2	43,0	0,30	75	230	46	1,130
MWS W3 DN 40	1 1/2"	40	40,0	49,6	51,5	0,30	90	240	42	1,530
MWS W3 DN 50	2"	50	49,7	60,5	62,2	0,50	110	260	32	1,665
MWS W3 DN 65	2 1/2"	65	63,0	76,5	80,0	0,60	200	300	16	3,580
MWS W3 DN 80	3"	80	80,0	96,0	98,0	0,60	240	500	10	4,900
MWS W3 DN 100	4"	100	118,0	115,0	99,0	0,60	290	600	10	5,900



Raiffeisenstrasse 6
 63549 Ronneburg
<https://connfix.de>

+49 6184 99 47 25 - 0
sales@connfix.de