



Metallwellenschlauch W2 Wellung Weit



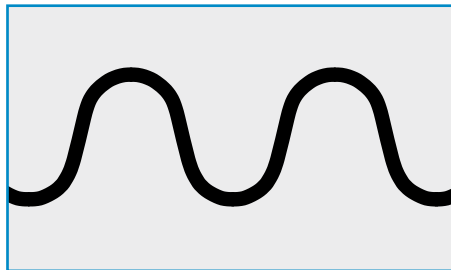

Daten MWS W2 Wellung Weit

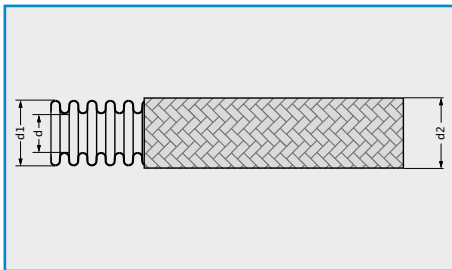



Werkstoff: 1.4404 (AISI 316 L)
Umflechtung: 1.4301 (AISI 304)
Schlauchdurchmesser: DN 6 - DN 50
Temperaturbereich: - 270 °C / + 600 °C

Bezeichnung	Innen Inch	Innen DN	d mm	d1 mm	d2 mm	Toleranz d, d1	BR stat. mm	BR dyn. mm	BD bei 20C° Bar	Kg/m
MWS W2 DN 6	1/4"	6	6,3	10,3	10,3	0,25	25	80	150	0,127
MWS W2 DN 8	5/16"	8	8,4	12,2	12,2	0,25	32	124	112	0,062
MWS W2 DN 10	3/8"	10	10,1	14,2	14,2	0,25	38	130	97	0,195
MWS W2 DN 12	1/2"	12	12,4	16,7	17,3	0,25	45	140	75	0,228
MWS W2 DN 16	5/8"	16	16,4	21,4	22,8	0,25	58	160	60	0,35
MWS W2 DN 20	3/4"	20	20,3	26,7	27,8	0,25	70	170	62	0,453
MWS W2 DN 25	1"	25	25,4	32,4	33,3	0,30	85	190	43	0,595
MWS W2 DN 32	1 1/4"	32	33,8	41,2	42,6	0,30	105	260	46	0,922
MWS W2 DN 40	1 1/2"	40	39,8	49,5	51	0,30	130	300	42	1,222
MWS W2 DN 50	2"	50	50,2	60,3	61,5	0,50	160	320	32	1,300



 Raiffeisenstrasse 6
 63549 Ronneburg
 <https://connfix.de>

 +49 6184 99 47 25 - 0
 sales@connfix.de